

ENELTEC[®]
brighten your ideas

SMD 5050 LED G24 Lights




EPISTAR



Specifications:

- LED: EPISTAR SMD 5050
- Beam Angle: 120°
- Voltage: 85-265VAC
- Socket: G24/E27
- Color: 2800-3200K / 4000-4500K / 6000-6500K
- Operating temperature: -35 to + 50°C
- Material: Aluminium Alloy Die-cast Shape
- Light Degradation: < 5% in 20,000 hours
- Warranty: 3 years



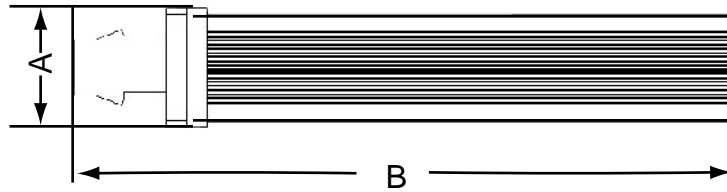

Model	Dimension(mm) A*B
ENSP-6WG24-02(D)	35x35x120
ENSP-6WE27-02(D)	35x35x127
ENSP-7WG24-02A(D)	35x35x120
ENSP-7WE27-02A(D)	35x35x127
ENSP-7WG24-02B(D)	Φ40x123
ENSP-7WE27-02B(D)	Φ40x131
ENSP-10WG24-02(D)	35x35x160
ENSP-10WE27-02(D)	35x35x166
ENSP-12WG24-02A(D)	35x35x160
ENSP-12WE27-02A(D)	35x35x166
ENSP-12WG24-02B(D)	Φ40x168
ENSP-12WE27-02B(D)	Φ40x176

Applications:

High power LED bulbs are designed for use in supermarkets, jeweller's shops, advertisement box, office building, or for direct replacement of conventional lamps.

Features and advantages:

- Direct replacement of conventional lamps
- LED life of 50,000 hours continuous work
- No hazard of mercury or lead entering the environment
- Solid-state, shock and vibration resistant light sources runs on
- Major reduction in power costs, maintenance free
- Generate little heat
- No fluorescent flickering
- No danger of broken glass
- External power supply with high power factor & low harmonic current

Testing Data:

No.	Model	Power (W)	Lumen (LM)	LED	Beam Angle	Base	Input Voltage	PF	Color	CRI
1	ENSP-6WG24-02	6	530	EPPISTAR 5050	120°	G24	85-265VAC	0.6	2800-3200K/ 4000-4500K/ 6000-6500K	>80
2	ENSP-6WG24-02D	6	530 Dimmable	EPPISTAR 5050	120°	G24	85-265VAC	0.6	2800-3200K/ 4000-4500K/ 6000-6500K	>80
3	ENSP-6WE27-02	7	530	EPPISTAR 5050	120°	E27	85-265VAC	0.6	2800-3200K/ 4000-4500K/ 6000-6500K	>80
4	ENSP-6WE27-02D	7	530 Dimmable	EPPISTAR 5050	120°	E27	85-265VAC	0.6	2800-3200K/ 4000-4500K/ 6000-6500K	>80
5	ENSP-7WG24-02A	7	680	EPPISTAR 5050	120°	G24	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
6	ENSP-7WG24-02AD	7	680 Dimmable	EPPISTAR 5050	120°	G24	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
7	ENSP-7WE27-02A	7	680	EPPISTAR 5050	120°	E27	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
8	ENSP-7WE27-02AD	7	680 Dimmable	EPPISTAR 5050	120°	E27	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
9	ENSP-7WG24-02B	7	680	EPPISTAR 5050	120°	G24	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
10	ENSP-7WG24-02BD	7	680 Dimmable	EPPISTAR 5050	120°	G24	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
11	ENSP-7WE27-02B	10	680	EPPISTAR 5050	120°	E27	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
12	ENSP-7WE27-02BD	10	680 Dimmable	EPPISTAR 5050	120°	E27	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
13	ENSP-10WG24-02	10	900	EPPISTAR 5050	120°	G24	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
14	ENSP-10WG24-02D	10	900 Dimmable	EPPISTAR 5050	120°	G24	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
15	ENSP-10WE27-02	12	900	EPPISTAR 5050	120°	E27	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
16	ENSP-10WE27-02D	12	900 Dimmable	EPPISTAR 5050	120°	E27	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
17	ENSP-12WG24-02A	12	1080	EPPISTAR 5050	120°	G24	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
18	ENSP-12WG24-02AD	12	1080 Dimmable	EPPISTAR 5050	120°	G24	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
19	ENSP-12WE27-02A	12	1080	EPPISTAR 5050	120°	E27	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
20	ENSP-12WE27-02AD	12	1080 Dimmable	EPPISTAR 5050	120°	E27	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
21	ENSP-12WG24-02B	12	1080	EPPISTAR 5050	120°	G24	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
22	ENSP-12WG24-02BD	12	1080 Dimmable	EPPISTAR 5050	120°	G24	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
23	ENSP-12WE27-02B	12	1080	EPPISTAR 5050	120°	E27	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80
24	ENSP-12WE27-02BD	12	1080 Dimmable	EPPISTAR 5050	120°	E27	85-265VAC	0.95	2800-3200K/ 4000-4500K/ 6000-6500K	>80

● Packing:

Model	ENSP-6WG24-02(D) ENSP-6WE27-02(D) ENSP-7WG24-02A(D) ENSP-7WE27-02A(D)	ENSP-10WG24-02(D) ENSP-10WE27-02(D) ENSP-12WG24-02A(D) ENSP-12WE27-02A(D)	ENSP-7WG24-02B(D) ENSP-7WE27-02B(D)	ENSP-12WG24-02B(D) ENSP-12WE27-02B(D)
Carton (mm)	480×330×350	480×330×350	480×330×350	480×330×350
Quantity (PCS)	125	96	125	96
Net Weight/Gross Weight (Kg)	12.1/12.5	11.5/14.1	15.5/17.5	14.1/15.5

Warning:

1. It is non-waterproof.
2. Please do not touch it when they are light.
3. Please use traditional coop transformer and switch for power supply. Do not use traditional electronic transformer for power supply.
4. The angle of emitting light can be designed according to the client's requirements

